


Ramor protection steels



SSAB



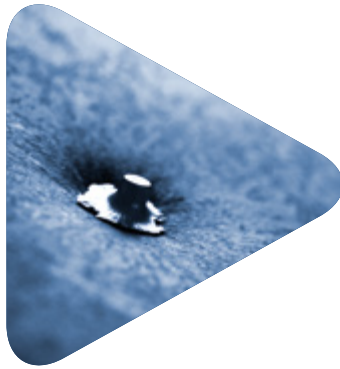

No other steel manufacturer in the world has the same knowledge and expertise in terms of armor steel production as SSAB.

From our long experience, we understand the needs of our users and the demands that are required of our products. With our unique manufacturing capability, knowledge and expertise we can create the properties necessary to meet these demands.

With tailor made properties, tight thickness tolerances and excellent surface quality, these steels have protected lives and kept property safe for decades.

Reduce weight, maintain protection level. Upgrade to Ramor 600.

Ramor armor steel is extremely strong and tough. By using optimized alloy content in combination with patented direct quenching process, high hardness and toughness can be achieved.

Ramor 600 opens up new possibilities to reduce weight of a given protection solution thanks to the very good ballistic properties of this new grade. Ramor is developed for applications where blast protection or high ballistic resistance is required, such as armored vehicles, doors, window frames and systems for transport of valuables. Shooting range equipment is another application for which the product has been developed in cooperation with customers.

Save weight by upgrading to Ramor 600


The weight of armouring in a passenger compartment can be reduced by around 20 percent when upgrading from Ramor 500 to Ramor 600 depending on the threat level.

Type of threat	Weight saving potential
Mild threats (3.0 - 6.5 mm)	10-23%
Severe threats (8.0 - 14 mm)	15-20%

Weight reduction can give:


- ▶ increase payload
- ▶ better fuel consumption
- ▶ extend lifetime of the vehicle

For more details and technical advice, please contact your local sales man or visit www.ssab.com

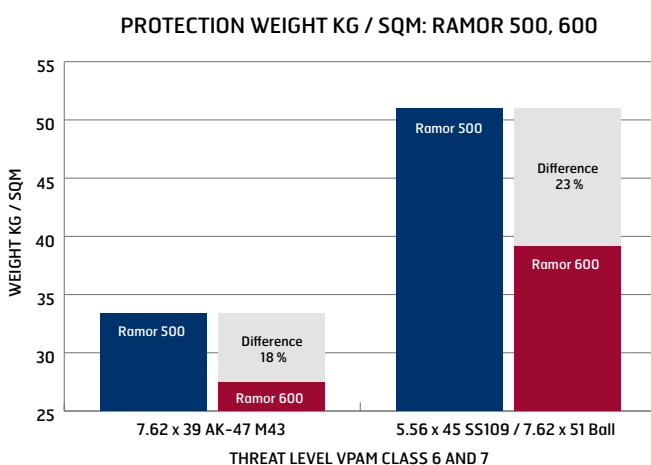

Passenger compartment manufactured from Ramor 500, 550 or 600: Bent and welded components.

- ▶ Typical vehicle parts are
 - ▶ A-, B- and C-pillars
 - ▶ All four sides, roof, fire wall, etc.
- ▶ The thickness 3.0 - 13 mm is chosen based on the protection class
- ▶ You can save the weight equivalent of 2-3 persons by upgrading from 500 to 550 grade

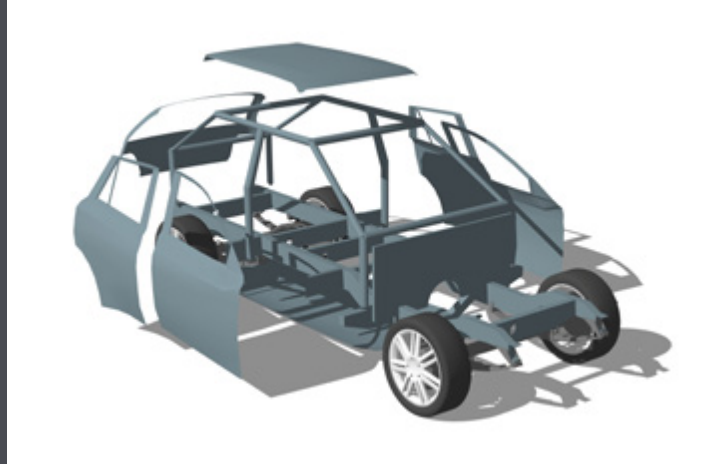

Floor Structures: Ramor 400, Ramor 450 or Ramor 500.



Understanding your needs. Understanding Ramor steel.

Protect product range*	Thickness (mm)
Ramor 300	3.0-6.0
Ramor 400	3.0 - 30.0
Ramor 450	4.0 - 16.0
Ramor 500	2.0 - 30.0
Ramor 550	3.0-15.0
Ramor 600	3.0-5.0

* For more product information check datasheets at www.ssab.com



Plate thickness recommendations vs protection levels

EN 1522						
Protection level	Threat	Velocity (m/s)	Range (m)	Ramor 500 (mm)	Ramor 550 (mm)	Ramor 600 (mm)
FB2	9mm Luger FJ/CB/SC	415±10	5	2.0		
FB3	357 Magnum	430±10	5	2.3		
FB4	.44 Mag FJ/FN/SC	440±10	5	2.5		
FB4+	7,62x39 AK47(M43)	700±10	10	4.0	3.7	3.5
FB6	5,56x45 SS109	950±10	10	6.5	5.9	5
	7,62x51 NATO Ball	830±10				
FB7	7,62x51 NATO AP	820±10	10	14.5	13.0	

NIJ 0108.01						
Protection level	Threat	Velocity (m/s)	Range (m)	Ramor 500 (mm)	Ramor 550 (mm)	Ramor 600 (mm)
II	9mm FMJ	358±12	5	2.2		
	.357 Magnum JSP	425±15				
IIIA	9mm FMJ	426±15	5	2.5		
	.44 Magnum SWC	436±15				
III	7,62x51 FMJ	838±15	15	6.0	5.0	5.0

VPAM PM 2007						
Protection level	Threat	Velocity (m/s)	Range (m)	Ramor 500 (mm)	Ramor 550 (mm)	Ramor 600 (mm)
VPAM6	7,62x39 Ball	720±10	10	4.25	3.7	3.5
VPAM7	5,56x45 SS109	950±10	10	6.5	5.9	5
	7,62x51 NATO Ball	830±10				
VPAM8	7,62x39 API BZ	740±10	10	12.2	10.1	
VPAM9	7,62x51 NATO AP	820±10	10	14.5	13.0	


Ramor Workshop Recommendations

TYPICAL MECHANICAL PROPERTIES



Ramor	Yield strength R_e MPa	Tensile Strength R_m MPa	Elongation A_5 %	Typical Hardness HBW	Test temperature C	Impact toughness Charpy V J *
Ramor 300	820	940	8	290	-40°C	60
Ramor 400	1100	1300	8	410	-40°C	20
Ramor 450	1200	1400	10	440	-40°C	35
Ramor 500	1450	1700	7	520	-40°C	20
Ramor 550	1550	1850	7	570	-40°C	16
Ramor 600	1650	2000	7	600	-40°C	12

* The Charpy V test piece is 10x10 mm.

Bending force for Ramor 500 (for Ramor 550 add +10 %)

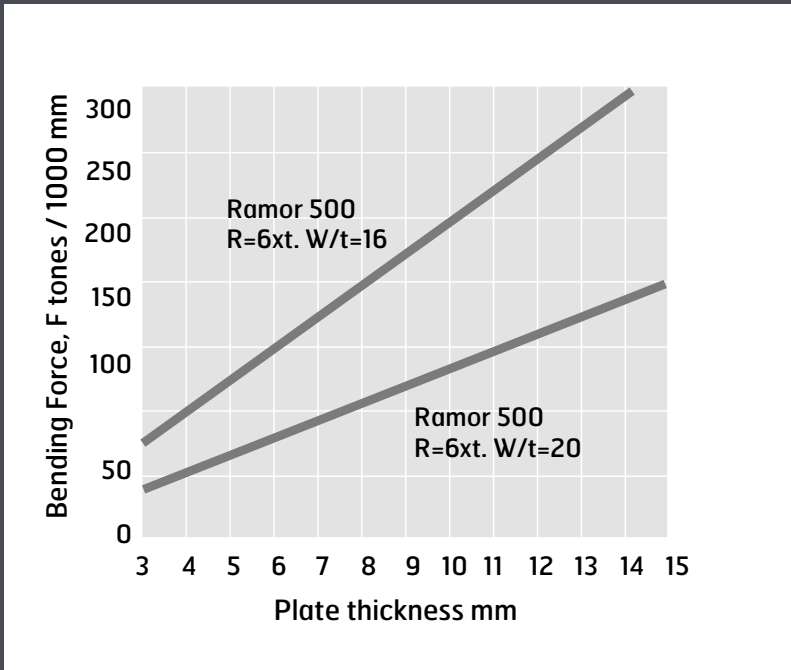

Springback after bending (90 degrees) R/t = 6

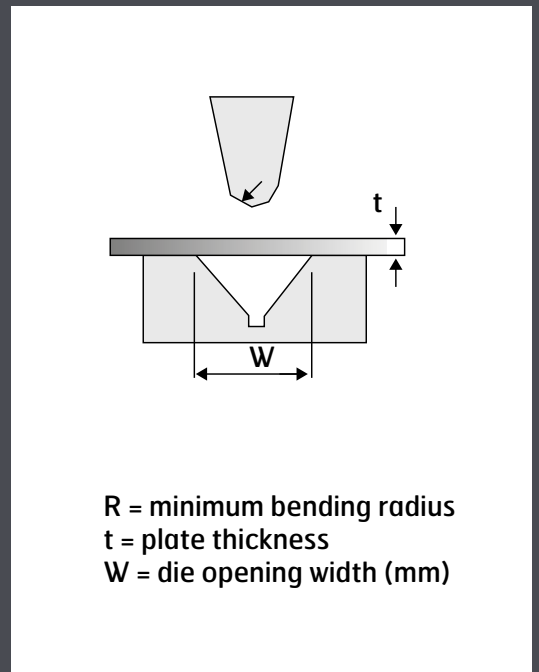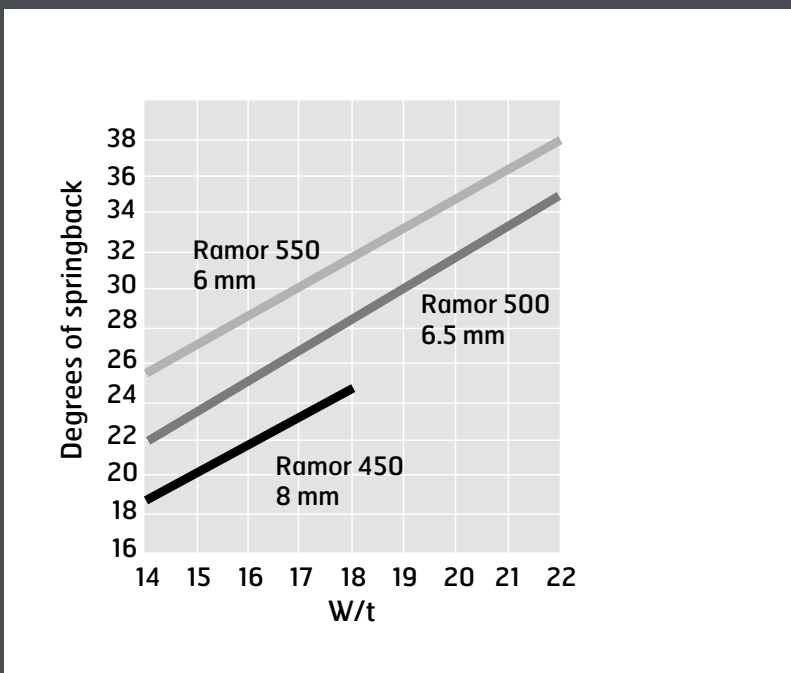

R = minimum bending radius
 t = plate thickness
 W = die opening width (mm)

Ramor	400	450	500	550	600
Minimum bending radius R both directions	5xt	4xt	6xt	6xt	Contact SSAB
Recommended gap width W/t	14 - 18	12 - 16	16 - 20	16 - 20	Contact SSAB

RECOMMENDED AUSTENITIC WELDING CONSUMABLES

Welding method	EN Classification	AWS Classification	Consumables (Esab)	Type
GMAW, solid wire	EN 12072 G 18 8 Mn	AWS 5.9 ER307	OK Autrod 16.95	Austenitic
SMAW, electrode	EN 1600 E 18 8 Mn B 4 2	AWS 5.4 E307-15	OK 67.45	Austenitic

RECOMMENDED UNDERMATCHING FERRITIC CONSUMABLES

Welding method	EN Classification	AWS Classification	Consumables (Esab)	Type
GMAW, Solid wire	EN 440 G3Si1	AWS A5.18 ER70S-6	OK Autrod 12.51	Ferritic
SMAW, electrode	EN 499 E 42 4 B 42 H5	AWS A5.1 E7018	OK 48.00	Ferritic

PREHEATING / WORKING TEMPERATURE UNDERMATCHING FERRITIC CONSUMABLES

	Plate thickness mm		
	10	20	30
Ramor 400	+20°C		Austenitic +20°C
Ramor 500		+100°C	+150°C
Ramor 450, 550, 600	Austenitic +20°C		

THICKNESS TOLERANCES (LOWER TOLERANCES = 0.00)

Thickness mm	Cut to length	Cut to length Special tolerance*	Heavy plates
2.00 – 3.00	+0.32 mm	+0.20 mm*	
3.01 – 4.00	+0.36 mm	+0.24 mm*	
4.01 – 5.00	+0.40 mm	+0.24 mm*	
5.01 – 6.00	+0.42 mm	+0.28 mm*	+0.74 mm
6.01 – 6.50	+0.44 mm	+0.30 mm*	+0.74 mm
6.51 – 6.99			+0.74 mm
7.00 – 7.99			+0.76 mm
8.00 – 9.99			+0.80 mm
10.00 – 11.99			+0.90 mm
12.00 – 14.99			+1.00 mm
15.00 – 19.99			+1.10 mm

* Special tolerance by separate agreement only. Typical plate thickness is middle of 0 mm and upper tolerance.

SSAB is a Nordic and US-based steel company. SSAB offers value added products and services developed in close cooperation with its customers to create a stronger, lighter and more sustainable world. SSAB has employees in over 50 countries. SSAB has production facilities in Sweden, Finland and the US. SSAB is listed on Nasdaq Stockholm and has a secondary listing on Nasdaq Helsinki. www.ssab.com.

SSAB

SE-613 80 Oxelösund
Sweden

T +46 155-25 40 00
F +46 155-25 40 73
ramor@ssab.com

www.ssab.com

SSAB